Block Dimensions

Classic 6

General Information

Absorption...meets or exceeds ASTM c90-75 standards

Compressive strength...3000 PSI approximate minimum (unless otherwise specified)

Composition . . . hight strength, high density, "0" slump concrete

Unit Information

Beveled Classic Unit:

18" Beveled Split Face . . . . . 6"H X 18" W, 56 Lbs. Approx. . . . . 0.75 Sq. Ft. Face

Straight Classic Unit:

18" Straight Split Face . . . . . 6"H X 18"W, 58 Lbs. Approx. . . . . 0.75 Sq. Ft. Face

Universal Cap Straight Split Face . . . . . 4"H X 18"W front and 4"H X 14"W back, 54 LbS. approx.
. . . . . 0.50 Sq. Ft. Front, 0.39 Sq. Ft. Back
. . . . . Average running length is 16" (see installation manual)

Face Options

Face patterns . . . . Beveled Split Face
Straight Split Face
Rustic Face

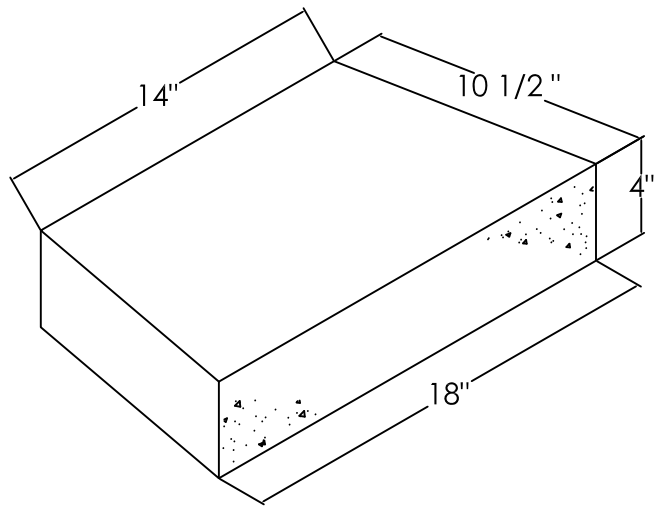

Classic Universal Cap - Front

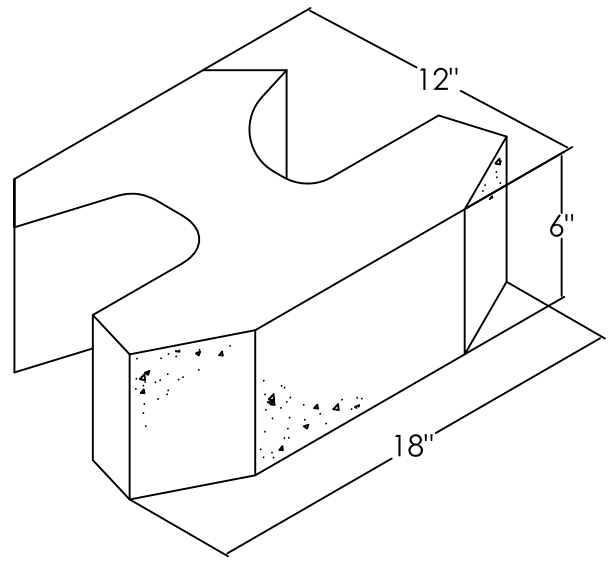

Beveled Classic 6" Unit

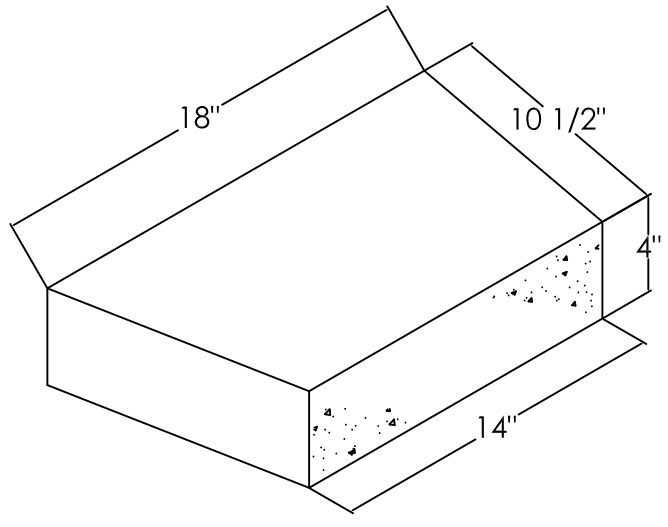

Classic Universal Cap - Back

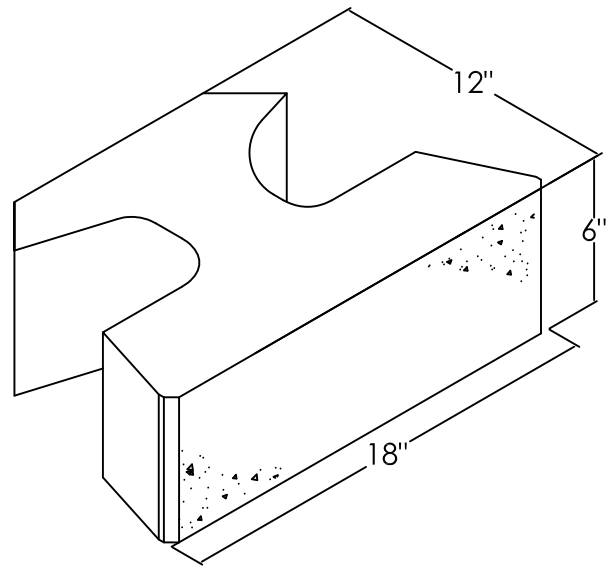

Straight Classic 6" Unit

This drawing is furnished for preliminary design purposes only, and should not be used for final design drawings or construction drawings without the certification of a professional engineer registered in the state in which the wall will be constructed

No.	Date.	Revision.	By.

PREPARED BY:

ROCKWOOD® RETAINING WALLS
A better way.™

LEGEND

- Impermeable Compacted Fill
- Compacted Fill
- Native Soil
- 3/4" Crushed Stone
- Leveling Pad
- Geogrid

Project Name: XX
Project Location: YY
Drawing Description: Block Dimensions

Prepared for: CCC DDD
Drawn by:
Checked by:
Sheet # of $
Date: MM/DD/YYYY
Project Number: WWWPRO#